

**DS-K3G530X
Pro Tripod Turnstile**

- Motor-driven, longer service life and better traffic experience.
- Better anti-tailgating function, eliminating tailgating and accurate counting.
- Slim appearance, but also strong, showing beauty and elegance.
- Applicable to indoor and outdoor scenes, whether it is scenic spots, gyms or bus stations.
- Easy to configuration and maintenance by PC web function.

▪ Specification


System	
Motor	Brushless motor
MCBF	≥ 5 million times
Network	
Wired network	10/100 Mbps self-adaptive Ethernet
Interface	
Network interface	1
Lock control	2
Exit button	2
Alarm output	2
TAMPER	NA
RS-485	4
RS-232	2
Wiegand	2
Fire alarm input	1
Case input	2
Hardware	
Access controller	Supplied
Supercapacitor	Supplied
Network switch	Not supplied
Capacity	
Card capacity	500,000
Event capacity	500,000
Authentication	
Card	EM card, M1 card, DESfire card
Function	
Configuration via PC Web	Support
Configuration via mobile Web	Support
Audio prompt	Support
Communication protocol	TCP/IP,ISAPI
Keypad configuration	Support
Keyfob	Support, 433 MHz/868 MHz, within 25 m
General	
Throughput	30 to 60 persons per minute The actual throughput is affected by the person passing rate and passing method.
Lane width	550 mm (21.65")
Barrier material	1.2 mm stainless pipe
Pedestal material	SUS304 stainless steel 1.5 mm,SUS304 stainless steel 1.2 mm
Power consumption	Standby: 35 W Working: 65 W Peak: 75 W
Working temperature	-20 °C to 65 °C (-4 °F to 149 °F)
Working humidity	0% to 95% (No condensing)
Protective level	IPX4

Dimensions	Without package: 1500 mm × 130 mm × 1002.5 mm (59.1" × 5.1" × 39.5") With package: 1660 mm × 510 mm × 1305 mm (65.4" × 20.1" × 51.4")
Weight	Net:52.22kg(115.13.lb);Gross:65.59kg(144.6.lb)
Approval	CE/CB/RoHS/REACH/WEEE
Power supply method	Power supply: 100 to 120 VAC~ / 200 to 240 VAC~, 50/60 Hz, 1.0-1.5A
Door open duration	5 to 60 sec
Configuration	
Module selection	NO

▪ **Available Model**

DS-K3G530X

▪ **Dimension**

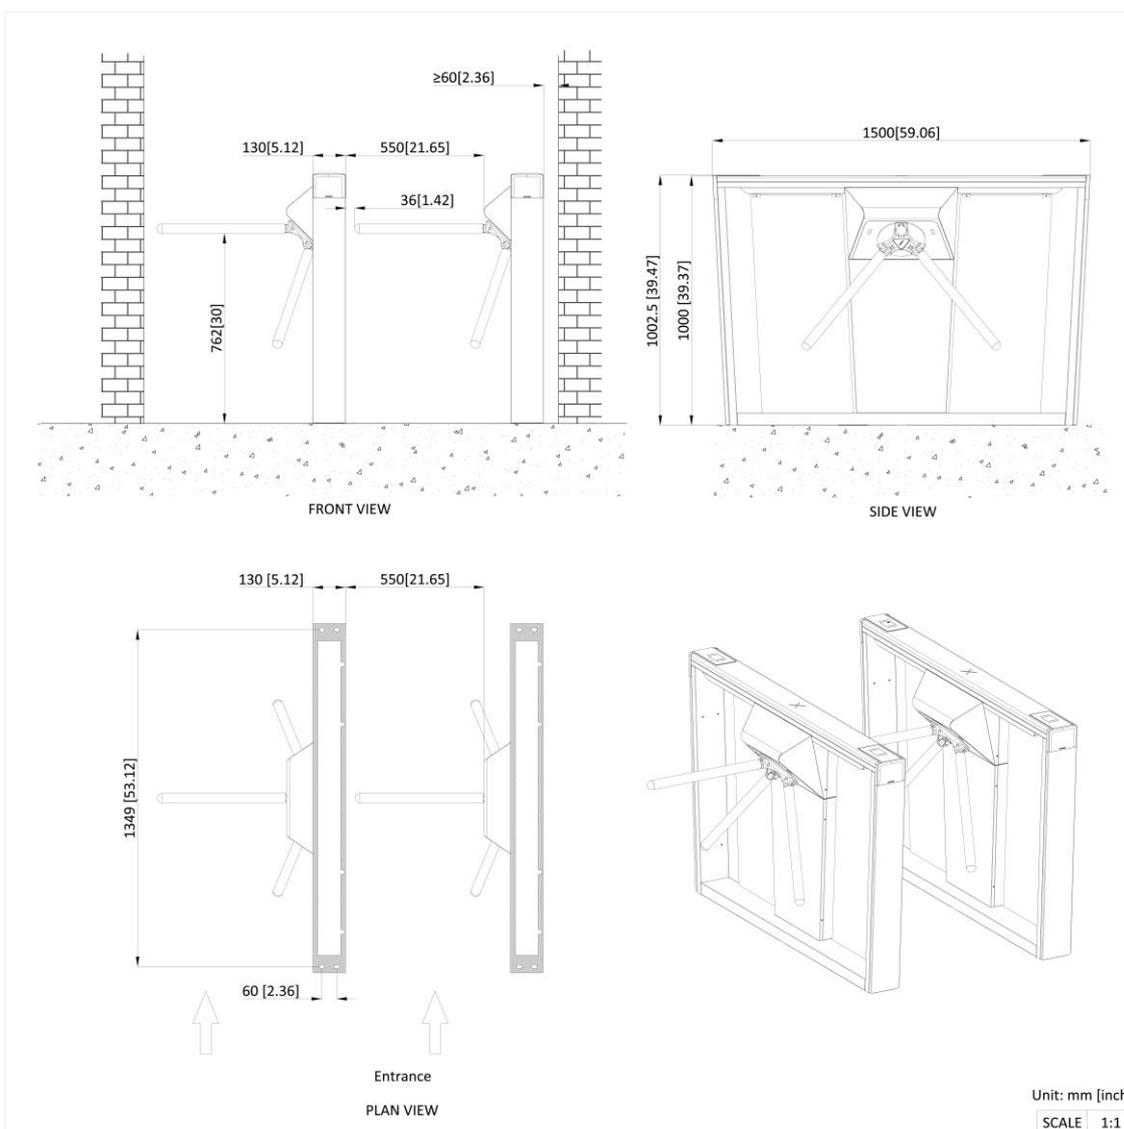

- **Accessory**
- **Optional**

DS-K3G530X-BASE
Fixed BASE



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

